
GuitarPCB Presents

NostalgiTone Bass Overthruster


This powerhouse overdrive delivers a massive range of grit and punch without sacrificing the natural character of your bass guitar or amplifier. Designed specifically to preserve low-end authority, it moves effortlessly from a bold, high-headroom clean boost to an aggressive, saturated growl while keeping your fundamental frequencies tight and powerful.

The active dual-band EQ gives you independent control over bass and treble, allowing you to shape everything from deep, powerful lows to crisp string definition. With its dynamic, touch-sensitive response and low background noise, the Bass Overthruster adds serious drive and character while keeping the natural voice of your rig intact.

🔧 Easy Wiring: No more daunting wiring hassles! Say hello to beauty under the hood. Enjoy all-analog tones with modern features that will slip into your gig bag, ensuring you are always ready to unleash your musical magic.

🔧 Available Components: We recognize the hurdles of component availability. Rest assured, we've carefully selected components for the **NostalgiTone** series currently available from today's popular vendors.


Do not settle for the ordinary when you can have extraordinary. Elevate your tone with the **NostalgiTone** series singles from GuitarPCB. Get yours today and discover a world of sonic possibilities like never before!

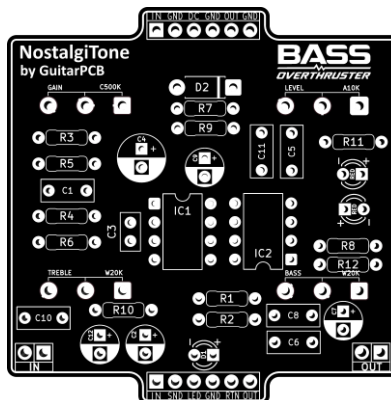

Mainboard Dimensions – 2.10" x 2.12" – Perfectly sized for a 1590B or 125B enclosure

Included with each PCB purchase. – (1) Mainboard, (1) wiring board, and (1) ribbon cable.

Schematic:

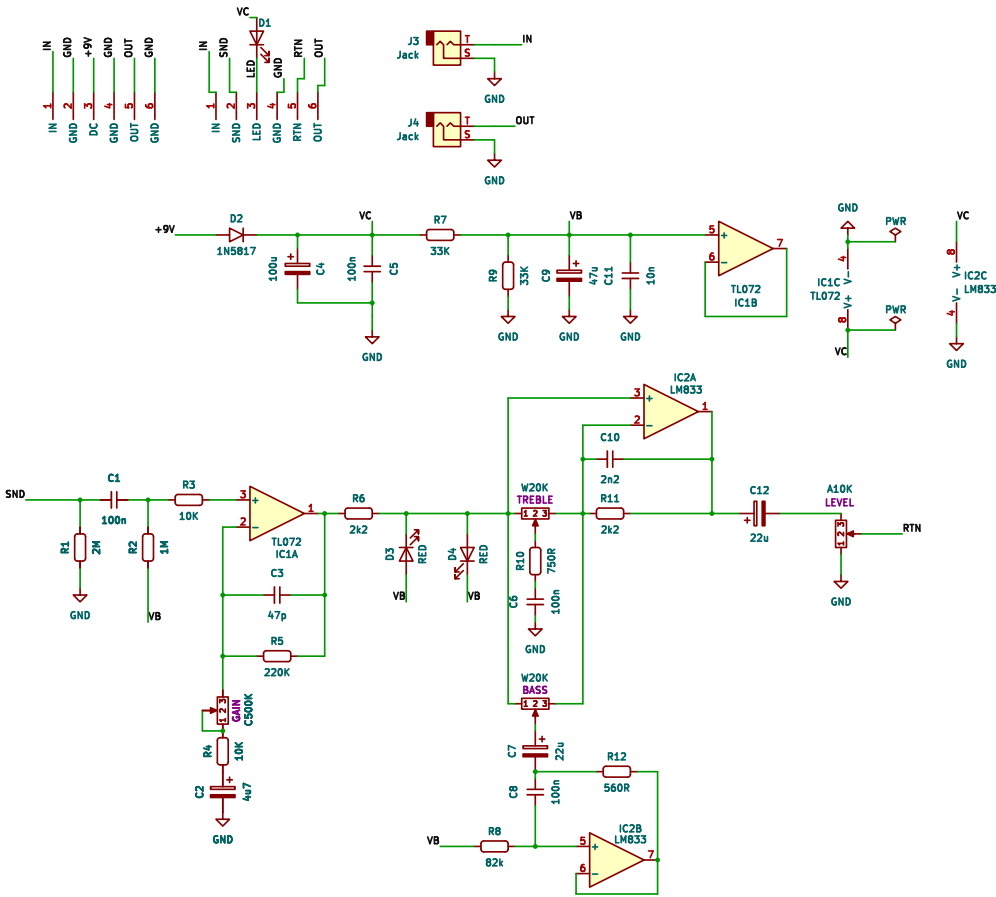

Bill of Materials:

PART	VALUE	PART	VALUE	PART	VALUE	PART	VALUE
R1	2M	R11	2k2	C8	100n	IC1	TL072
R2	1M	R12	560R	C9	47u	IC2	LM833
R3	10K			C10	2n2		
R4	10K	C1	100n			LEVEL	A10K
R5	220K	C2	4u7	C12	22u	GAIN	C500K
R6	2k2	C3	47p			BASS	W20K
R7	33K	C4	100u	D1	Status	TREBLE	W20K
R8	82k	C5	100n	D2	1N5817		
R9	33K	C6	100n	D3	RED	* CLR x1	1k8 - 4k7
R10	750R	C7	22u	D4	RED		

BOM features Kit values. Mods are not included with Kits.

Build Notes:

Included with the purchase of the main PCB board will be (1) standard foot switch wiring board (6 pins), and (1) 6 pin ribbon cable.


There are extra IN / Out pads located at the bottom of the PCB which are conveniently placed if you wish to use side jacks.

Use a standard 6-pin ribbon cable to connect the foot switch wiring board with the main board. The 3PDT wiring board contains an onboard (CLR) current limiting resistor. This is to adjust the brightness of the corresponding main board status LEDs. A value of 1k8 to 4k7 may be used.


* CLR x1 - Each wiring board requires an onboard (CLR) current limiting resistor. This is for the main board status LED.

Active Bass Mod: Swap D3 and D4 (Red LEDs) for Blue or Violet to increase headroom and provide a cleaner gain sweep with active pickups.

Wiring Diagram

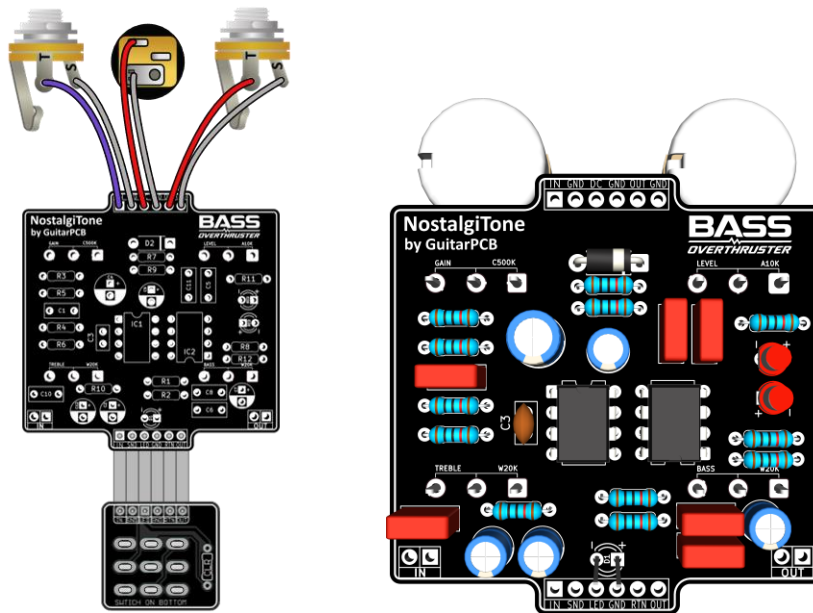


When using 1590B enclosures, it is best to mount the ribbon cable on top of the main board/3PDT wiring board instead of underneath. This is because the enclosure's compact size restricts space for the side jack Input and Output plugs.




The full-size drill templates for 125B and 1590B enclosures can be found on the following two pages. Additionally, you can find a link to Tayda's pre-drilled enclosures on the shop page at GuitarPCB.com.



This Build Document, PCB, Artwork and Schematic image are property of @GuitarPCB.com
All copyrights, trademarks and artworks remain the property of their owners.
Any company or product names used are for identification and educational purposes only.
GuitarPCB is in no way affiliated with any said companies and are not to be misrepresented.

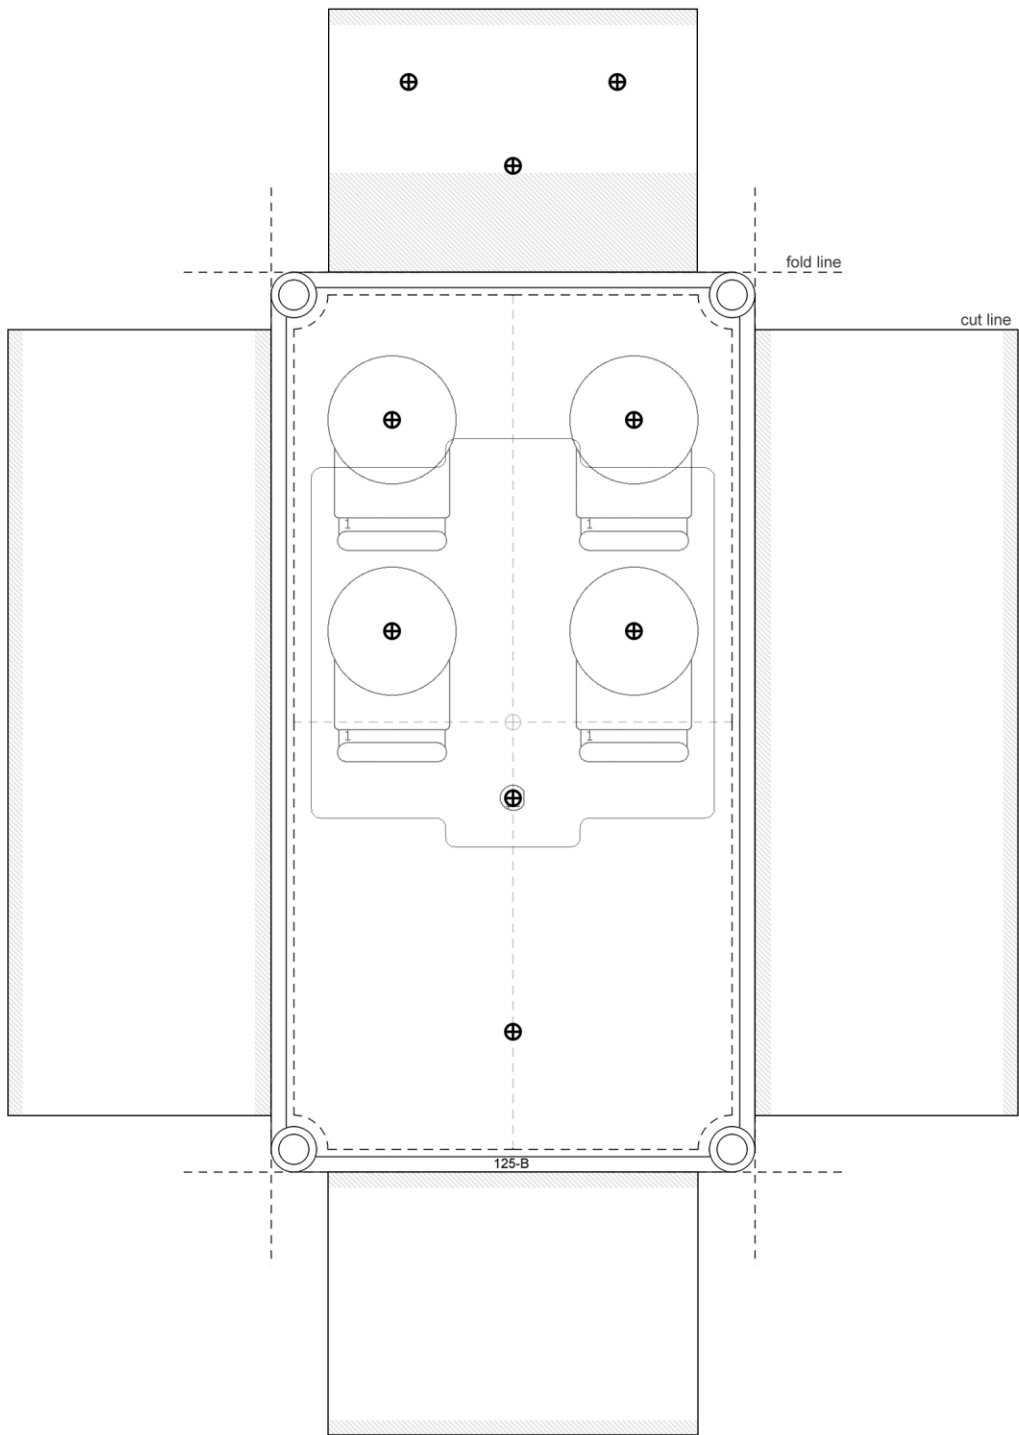

125B Drill Template

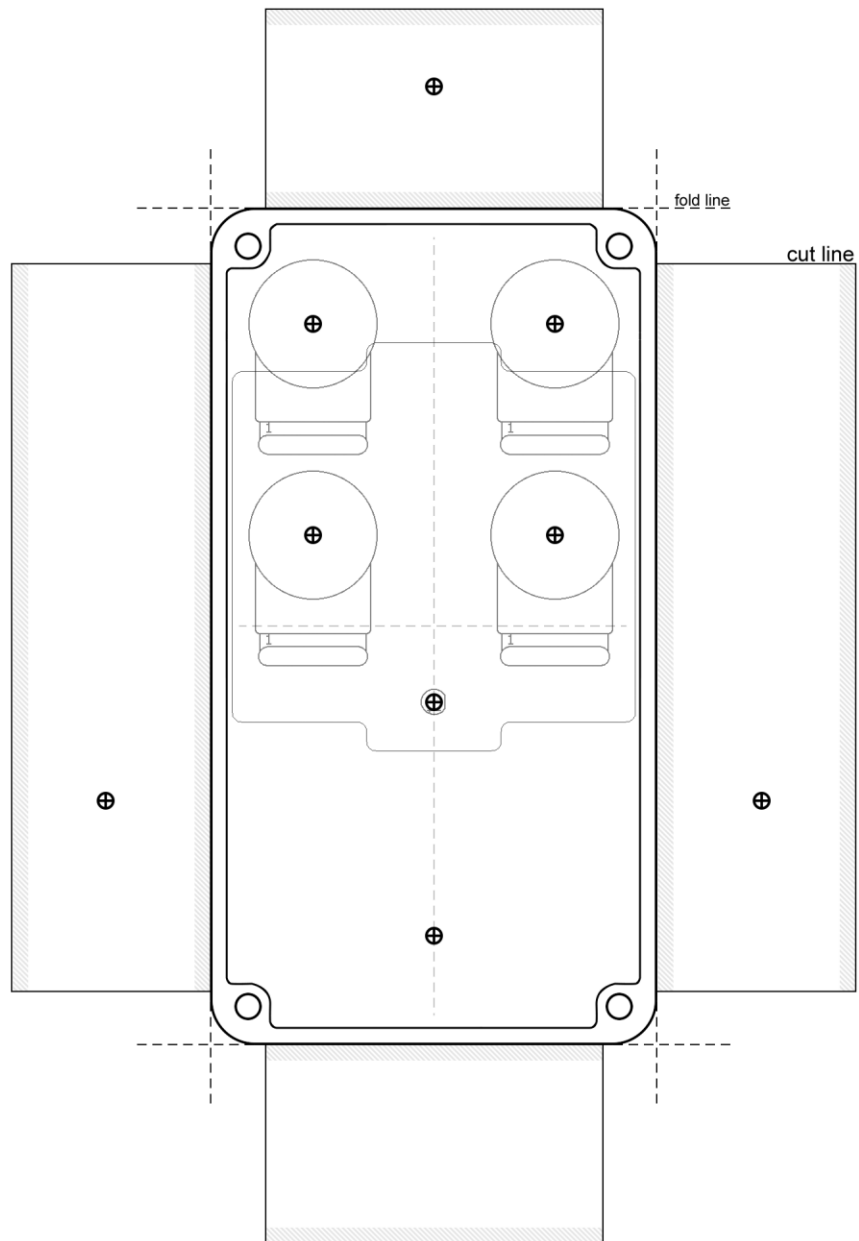

1590B Drill Template